


XPE INSULATION PIPE FOAM KIT FOR COPPER TUBING



PARAMOUNT®

Thermal & Acoustic Insulation

Paramount is a specialized supplier of Chemically Crosslinked Closed Cell FR Grade Pipe Insulation for AC copper tube suitable for any type of residential or commercial Air Conditioners.

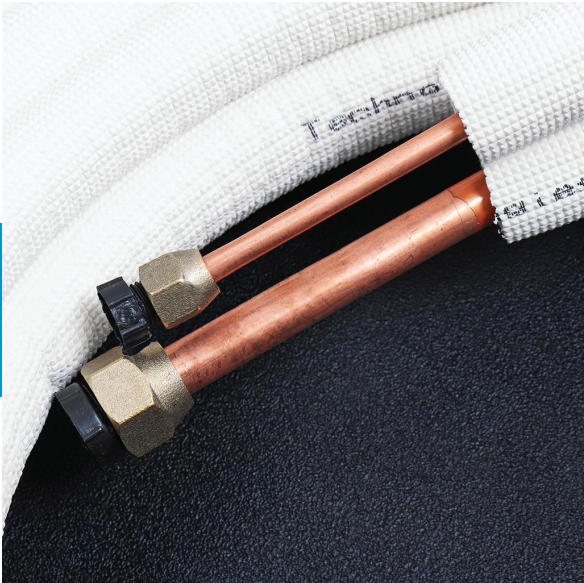


- Chemically Crosslinked Closed Cell Polyethylene Pipe Insulation with factory laminated UV protection layer.
- Available in different colors as per requirement

XPE Insulation Pipe Specifications

Insulation Property	Technical Details
Fire retardant	Class-1 as per BS476 Part-7 (CBRI Approved)
Thermal Conductivity	0°C -- 0.032 W/m°k 23°C -- 0.034 W/m°k 46°C -- 0.036 W/m°k
Average Density	30 ± 3 Kg/m3
Working temperature	–40°C +115°C
Water Vapour resistance (μ)	12805
Heavy Metals for RoHS Pollution	Passed (Directive 2002/95/EC)
Oxygen Index	27.7% (ASTM D 2863)
CFC /HCFC Content	Zero

Pipe Insulation (I.D.)

Dia in Inch	Dia in mm
1/4"	6 mm
3/8"	10 mm
1/2"	13 mm
5/8"	16 mm
3/4"	19 mm
7/8"	22 mm
1"	25 mm
1 1/8"	28 mm
1 1/4"	34 mm
1 3/8"	35 mm
1 5/8"	42 mm
1 7/8"	48 mm
2 1/8"	54 mm
2 3/8"	60 mm
2 5/8"	67 mm
3"	76 mm
3 1/8"	80 mm
3 1/2"	89 mm
4"	102 mm
4 1/2"	114 mm

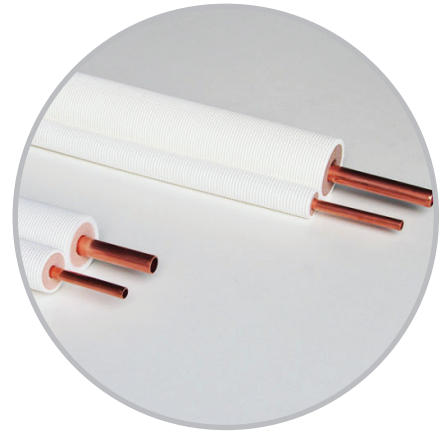



Insulation thickness available from 3mm to 50mm

 +91 9810363888, Customer Care: 011-47060000 (30 lines)

 sales@paramountinsulation.in

 www.paramountinsulation.in

 56 – B, Block-ED, Madhuban Chowk
Pitampura, New Delhi – 110088 (INDIA)

 Paramount Intercontinental Pvt Ltd
M-2 Industrial Area, Sonapat 131001, Haryana